


Profile FASKO

Ref. A04323

Ref. arch C4323

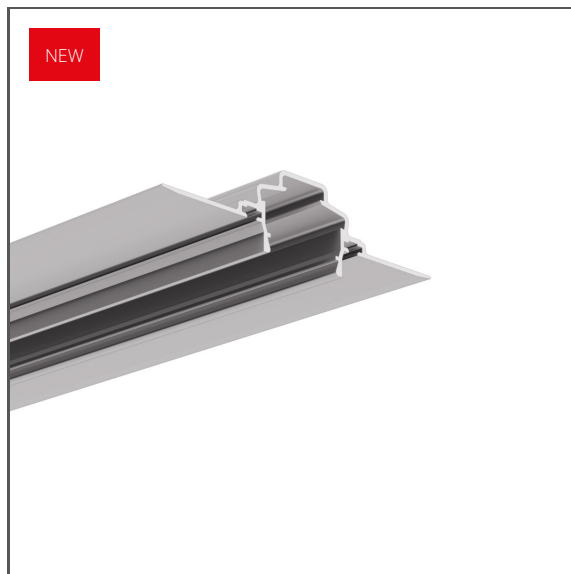

IP20



IP65

- For installation on facades
- Illuminated rustication of the facade
- Possibility of installing sealed 8K series LED strips
- Line of light flush with the surface
- Non visible aluminum elements

APPLICATION

- decorative lighting

MOUNTING


- in the thermal insulation layer of the building facade, using assembly adhesives

ADDITIONAL INFORMATION

- the use of a dedicated mounting insert allows the installation of two LED strips in the 8K sleeve
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

1:2

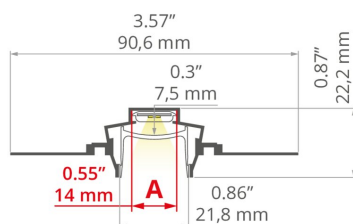

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver non anodized
Possible fixture IP	20, 65
Possible fixture shapes	linear, polygonal
Width	90.6 mm
Height	22.2 mm
LED gluing width A	14 mm
LED gluing width B	28 mm
Number of LED strips A (8 mm wide)	1
Number of LED strips B (8 mm wide)	2
Possibility of obtaining a line of light	yes
Building type	Outdoor, Commercial, Retail, HoReCa object
Facility zone	urban architecture, facade lighting, wejścia i bramy
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
To cover with plaster	yes

Length	Ref
1000 mm	A04323N_1 C4323NA_1
2005 mm	A04323N_2 C4323NA_2
3010 mm	A04323N_3 C4323NA_3

Profile FASKO

Ref. A04323





Ref. arch C4323

Wire out back of extrusion	yes
----------------------------	-----



SAMPLE PROJECTS



RELATED ACCESSORIES > RELATED COVERS

NAME		MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
HS-22		PC	73 %	<input type="checkbox"/> frosted	B17011M 17011
			94 %	<input checked="" type="checkbox"/> clear	B17011T 17022
LIGER-22		PC	62 %	<input type="checkbox"/> frosted	B17032M 17032V1
			B17032M 17032V1OP		
			39 %	<input checked="" type="checkbox"/> black	B17032C 17087
MUN-22		PC	86 %	<input checked="" type="checkbox"/> semi-transparent	B17042F 17042
BONI-22		PMMA	66.6 %	<input type="checkbox"/> frosted	B17119M 17119

RELATED ACCESSORIES > RELATED END CAPS

NAME		MATERIAL	COLOR	REF.
FASKO		ASA	<input checked="" type="checkbox"/> gray	C24465C02 24465
BONI-22		ASA	<input checked="" type="checkbox"/> gray	C24466C02 24466

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS



CONNECTOR
ZM-45
C28070N00
Ref. arch 40688



CONNECTOR
ZM-60
C28071N00
Ref. arch 40689



CONNECTOR
ZM-90
C28072N00
Ref. arch 40690




CONNECTOR
ZM-120
C28073N00
Ref. arch 40691



CONNECTOR
ZM-135
C28074N00
Ref. arch 40692



CONNECTOR
ZM-180
C28075N00
Ref. arch 40693



CONNECTOR
ZM-PION-45
C28084N00
Ref. arch 40702



CONNECTOR
ZM-PION-60
C28085N00
Ref. arch 40703



CONNECTOR
ZM-PION-90
C28086N00
Ref. arch 40704



CONNECTOR
ZM-PION-120
C28087N00
Ref. arch 40705



CONNECTOR
ZM-PION-135
C28088N00
Ref. arch 40706

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MASKING COVERS AND INSERTS




MOUNTING PAD
8K
C40684
Ref. arch 40684

Profile FASKO

Ref. A04323

Ref. arch C4323

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > TECHNICAL AND PROTECTIVE INSERTS



PROTECTIVE INSERT

TECH-22

C24531C02

Ref. arch 17124